


High-pressure pump 70M

The type 70M high-pressure pump provides a max. operating pressure of 3,000 bar and a max. flow rate of 9.8 l/min.

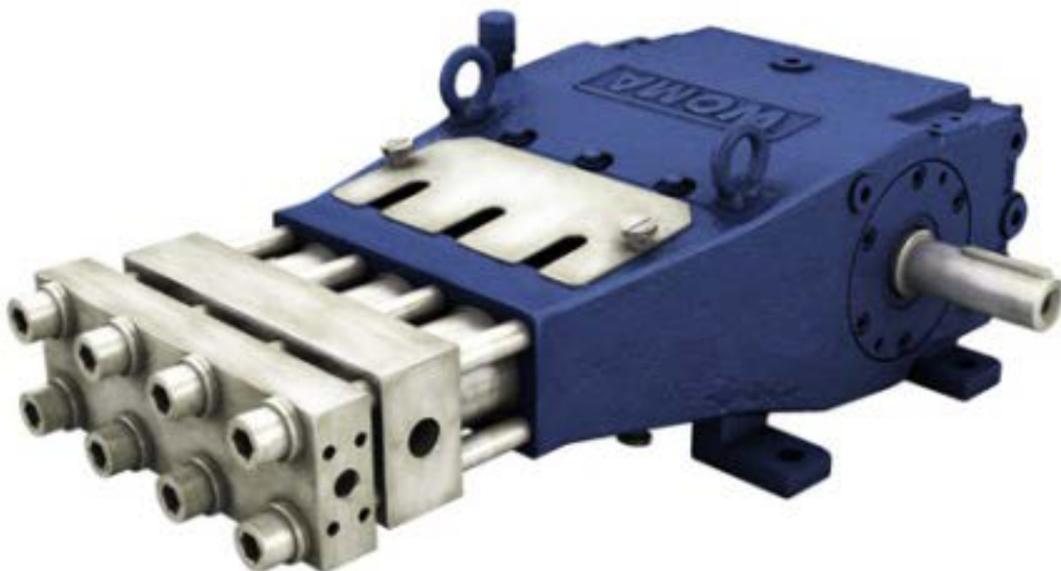

The high-pressure plunger pumps of the M-series provide working pressures of up to 3,000 bar. This makes the pumps of the M-series ideal for work such as cutting, fragmenting, stripping and de-rusting.

Built in central valve design, these plunger pumps have high volumetric efficiencies even at high pressures. The hard metal plungers used are extremely stable and ensure a long service life and therefore low maintenance costs. Furthermore, they are insensitive to temperature shocks. The guide of the plunger as well as the sealing water system ensures a long service life of the sealing system and counteracts the intrusion of air.

On request, the availability of an ATEX version can be checked.

Technical data		
Weight	approx.	117 kg
Inlet pressure connection		IG 3/4"
Pressure connection with flange		9/16" UNF-LH
Cooling water connection		IG 3/4"
Crankshaft	max. min.	825 1/min Depends on operation parameters
Drive shaft		Diameter 40mm k6, feather key DIN 6885 Sheet 1, A12 x 8 x 70
Torque at drive shaft	max.	572 Nm
Moment of inertia J		0.020 kgm ²
Centrifugal moment GD ²		0.78 Nm ²
Inlet pressure	min. max.	1.5 bar 5.0 bar
Pressure amplitude	max.	± 2.0 bar
Flow temperature	min. max.	+5 °C +30 °C (higher temperatures on request)
Flow inlet requirement	min.	2x nominal feed rate of the pump, depending on the interchangeable conversion set (1.75x nominal feed rate of the pump, depending on the interchangeable conversion set, if no internal gearbox cooling is installed)
Emission sound pressure level according to DIN EN ISO 11200		>80 dB(A)
Oil capacity of transmission end	approx.	3.2 l
Oil viscosity ISO VG under DIN 51517-2 or -3		320 mm ² /s
Oil temperature	max. Set value	80 °C 60 - 70 °C
Heat exchanger cooling water requirement approx.		1 - 2 l/min
Heat exchanger cooling water temperature min. max.		+5 °C +45 °C
Heat exchanger cooling water pressure min. max.		1.5 bar 10 bar

Performance variants**					
Pinion shaft		Crank shaft	P10		P12
750 [1/min]	825 [1/min]		3,000 bar*		2,500 bar
Gear ratio	[1/min]		[kW]	[l/min]	[kW]
	1.00	825*	33	6.0	45*
1.00		750	30	5.5	41
* Maximum values of the pump					
** Technical changes reserved					

* Maximum values of the pump
 ** Technical changes reserved

Overview pump 70M

